



Attorney's Docket : 12805-002001 / P71663US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Alan John Lunt  
Serial No. : 09/764,926  
Filed : January 18, 2001  
Title : MARKING DEVICE

Art Unit : Unknown  
Examiner : Unknown

Commissioner for Patents  
Washington, D.C. 20231

3700  
#3  
RECEIVED 3113  
JUN 14 2001  
2800 MAIL ROOM  
P. 10/11/01  
P. 10/11/01  
6/22/01

TRANSMITTAL OF PRIORITY DOCUMENT UNDER 35 USC § 119

Applicant hereby confirms his claim of priority under 35 USC § 119 from United Kingdom Application No. 0100495.1 filed January 9, 2001. A certified copy of the application from which priority is claimed is submitted herewith.

Please apply any charges or credits to Deposit Account No. 06-1050.

Respectfully submitted,

Date:

3-15-01

Y. Rocky Tsao  
Y. Rocky Tsao  
Reg. No. 34,053

Fish & Richardson P.C.  
225 Franklin Street  
Boston, MA 02110-2804  
Telephone: (617) 542-5070  
Facsimile: (617) 542-8906

20152725.doc

RECEIVED  
MAR 26 2001  
TC 3700 MAIL ROOM  
RECEIVED  
MAR 21 2001  
TC 3700 MAIL ROOM

CERTIFICATE OF MAILING BY FIRST CLASS MAIL

I hereby certify under 37 CFR §1.8(a) that this correspondence is being deposited with the United States Postal Service as first class mail with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

March 15, 2001  
Date of Deposit  
Diane M. Saturno  
Signature  
Diane M. Saturno  
Typed or Printed Name of Person Signing Certificate

RECEIVED  
MAR 22 2001  
TC 3700 MAIL ROOM



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed


Dated 16 February 2001

RECEIVED  
MAR 22 2001  
TC 3700 MAIL ROOM

RECEIVED  
MAR 26 2001  
TC 3700 MAIL ROOM

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

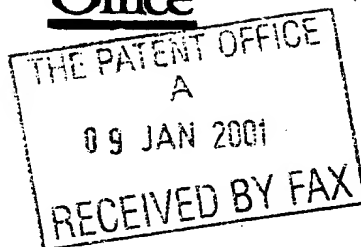

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference

P71663GB

2. Patent application number

(The Patent Office will fill in this part)

0100495.1

09 JAN 2001

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Edward Pryor & Sons Limited  
Egerton Street  
Sheffield  
S1 4JX

Patents ADP number (if you know it) 424481002

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

Marking Device

5. Name of your agent (if you have one)

Harrison Goddard Foote

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Fountain Precinct  
Leopold Street  
Sheffield  
S1 2QD

Patents ADP number (if you know it)

7914237001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)


8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

Yes

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	0
Description	x 14 ✓
Claim(s)	x 6 ✓
Abstract	x 1 ✓
Drawing(s)	x 4 ✓ A

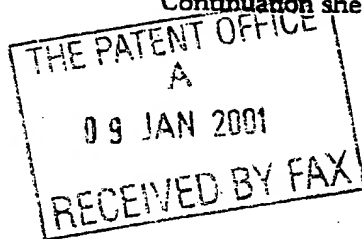

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) x 1 ✓

Request for preliminary examination and search (Patents Form 9/77) x 1 ✓ A

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

09 Jan 2001

12. Name and daytime telephone number of person to contact in the United Kingdom

Mark G F LUNT

0114 2747301

**Warning**


After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

**Statement of inventorship and of  
right to grant of a patent**

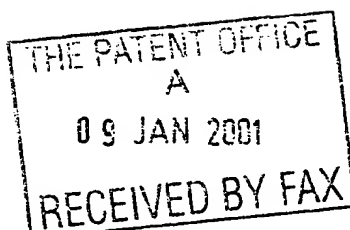

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference

P71663GB

2. Patent application number  
(if you know it)

0100495.1

09 JAN 2001

3. Full name of the or of each applicant

Edward Pryor & Son Limited

4. Title of the invention

Marking Device

5. State how the applicant(s) derived the right  
from the inventor(s) to be granted a patent

By virtue of employment

6. How many, if any, additional Patents Forms  
7/77 are attached to this form?  
(see note (c))

None

7.

I/We believe that the person(s) named over the page (and on  
any extra copies of this form) is/are the inventor(s) of the invention  
which the above patent application relates to.

Signature

Date

09 Jan 2001

8. Name and daytime telephone number of  
person to contact in the United Kingdom

Mark G F LUNT


0114 274 3701

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

## Patents Form 7/77

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

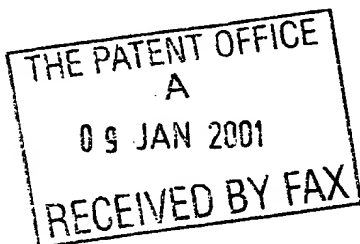

Alan John LUNN  
68 Hallam Grange Crescent  
Sheffield  
S10 4BD  
United Kingdom

Patents ADP number (if you know it): 3628765001

Patents ADP number (if you know it):

Patents ADP number (if you know it):

## Reminder

Have you signed the form?

Patents Form 7/77

DUPLICATE

**MARKING DEVICE**

This invention relates to a marking device, particularly for metal surfaces by impacted dot formation  
5 for permanent identification purposes.

In the automotive and aerospace industries (especially), it is more and more frequently desired to mark permanently different components of a vehicle in the  
10 course of its manufacture. Moreover, it is desired to mark pieces after assembly in the vehicle to ensure each is marked with the relevant markings for the vehicle in question. Thus, rather than marking individual components in a fixed marking machine, the desire now is  
15 to mark the components *in situ* with a portable, handheld marking device.

On the other hand, with the advent of machine readable codes, precise marking is of significant  
20 importance. There is a need therefore to combine the conflicting requirements of lightness and compactness of a handheld marking device with the precision and robustness that impact marking needs in order to be reliably machine readable.

25 US-A-6135022 addresses some of these issues but nevertheless fails to provide a design of device which is either easy to construct or has great precision. US-A-6135022 discloses a marking device having a base frame to  
30 which is pivoted a head drive frame in which a translational carriage is slidably disposed. A manifold is mounted on the carriage and carries a marking device. The head drive frame is pivoted by a motor driven cam plate. Another motor drives a belt for translational  
35 movement of the carriage. The whole arrangement is

disposed in a casing provided with a handle.

Despite being intended for handheld operation, the design is heavy, bulky and may lack precision.

5

Accordingly, it is an object of the present invention to overcome the problems identified above, or at least to mitigate their effects.

10 In accordance with the present invention there is provided a marking device comprising:

a housing of the device;

a frame pivotally mounted in the housing about a first axis;

15 a marking head mounted on the frame for translational movement in the frame by a first motor in a first direction parallel said first axis and spaced therefrom; and

20 a second motor arranged to pivot the frame with respect to the housing about said first axis in a second, substantially orthogonal direction.

By providing such an arrangement, the dual components of US-A-6135022 of the base frame and the casing are integrated in the same housing of the device so that the base frame of the above-identified patent is essentially dispensed with.

30 A handle may be provided for manipulating the device, and indeed, this is the primary application for the device. Nevertheless, the present device has applications other than in handheld arrangements. The compact, and hence relatively light, device is suited for connection to the end of robotic arms, for example, or  
35 even for installation in static marking machines.



Preferably, said housing is a clamshell housing opening in said first direction, said frame having a pivot pin captured in a bearing bush in each clamshell.

5

The clamshells may be moulded from plastics material, in which event there will inevitably exist some tolerance in the dimensions of the clamshell when mated together. Accordingly, a disc spring is preferably disposed on at least one pin between the housing and the frame to take up any tolerance between the housing and frame. The disc spring is compressed when the clamshells are first assembled and holds the frame in a specific position. This is done without greatly increasing the frictional engagement between the frame and the housing, at least not to such an extent that the frame is clamped by the housing. There is thus no need for the dimensional tolerances of the housing to be exact. Indeed, the extra friction caused by the disc spring has the advantage of providing some damping of the pivoting of the frame in the housing. Preferably, a disc spring is disposed on each pin.

Preferably, a window is provided in the housing through which the marking head protrudes. The window may be detachable from the housing, so that it may be exchanged for differently shaped windows adapted for engagement with differently shaped surfaces to be marked. The detachability of the housing also exposes the marking head, thereby facilitating exchange of the stylus of the marking head.

For example, the window may comprise a V-section across said first direction and be adjustable on the housing in a third direction substantially orthogonal

said first and second directions. Said adjustment permits the distance from the marking head to the surface of the object being marked to be adjusted depending on the shape and dimensions of the object being marked. V-section windows are especially suitable for marking cylindrical surfaces.

An alternative window may comprise a key element adapted to fit a corresponding locating element either permanently or temporarily fixed on a surface to be marked. The marking effected by the device is therefore precisely located with respect to the locating on the object being marked.

Preferably, the window has a facing of resilient material adapted to abut the surface to be marked and reduce the tendency for the device to "walk" during actuation of the marking head.

Said marking head preferably has a stylus pin arranged to be driven in said third direction against a surface to be marked.

Said pin is preferably driven by a solenoid coil in a head housing and comprises a ferromagnetic piston slideable in a cylindrical chamber to impact a base of said pin. A return spring preferably returns the pin and piston to a ready position.

Said frame preferably comprises a rail and a carriage slideable along said rail in said first direction. In this event, said head housing may be mounted substantially directly on said carriage and is about the same dimensions as said carriage so that recoil and return impacts of said piston are transmitted

directly into said carriage and thence to the rail and frame. Bolting the head housing directly onto the carriage and a rail practically imposes a substantial rail on the marking device. That is to say, commercially available carriages and rails are such that a carriage large enough to have the head housing of the marking head mounted directly on the carriage necessarily imposes a robust and massive rail. However, it is precisely here that mass and bulk are desirable in order to absorb impact vibration caused by the marking head, as well as providing a heat sink for the solenoid, and as well as the inertial reaction mass for the accelerating solenoid piston.

In a second, different aspect, the present invention provides a marking device comprising:

a housing of the device;

a frame arranged for pivotal movement with respect to the housing about a first axis;

a marking head mounted on the frame for translational movement in the frame by a first motor in a first direction parallel said first axis and spaced therefrom; and

a second motor arranged to pivot the frame with respect to the housing about said axis in a second, substantially orthogonal, direction; wherein

said marking head includes a stylus pin adapted to be driven in a third direction substantially orthogonal said first and second directions against a surface to be marked, the device having a centre of gravity substantially coincident said third direction over substantially all movements of the frame in said second direction.

This arrangement ensures that recoils and rebounds

of the marking device do not cause moments of inertia about the centre of gravity thereby reducing the tendency of the device to creep or walk across a works surface.

5 In a third aspect, the invention provides a marking device comprising:

a housing of the device;

a frame arranged for pivotal movement with respect to the housing about a first axis;

10 a marking head mounted on the frame for translational movement in the frame by a first motor in a first direction parallel said first axis and spaced therefrom;

a second motor arranged to pivot the frame with respect to the housing about said axis in a second, substantially orthogonal, direction; and

15 said motors being disposed substantially within the confines of the frame.

20 By disposing the motors within the confines of the frame, they do not project beyond the frame and, accordingly, a compact arrangement ensues. Moreover, the requirements of the second aspect of the present invention are also facilitated by this arrangement.

25 In both the second and third aspects, a handle may be provided for manipulating the device, and, like in the first aspect of the present invention, this is the primary application for the device.

30 Preferably, each motor comprises a body, and a rotary armature threaded on a fixed screw. By fixing the screw, and moving the motor up and down the screw, there is no movement of the screw along its longitudinal axis, and therefore no need to provide the space for such

35

movement.

Preferably the first and second, first and third, or ideally first second and third aspects of this invention are combined, to a greater or lesser extent, in the same device. That is also to say, of course, that in the second and third aspects, when not employing the first aspect, the frame will be pivoted in an element separate from, but fixed in, the housing.

In this event, the first motor is preferably carried on the carriage, the fixed screw being fixed in the frame. The frame may comprise a U-shaped element along the base of which is fixed a rail and between the arms of which is fixed the screw. Said pivot pins are also preferably disposed in said arms.

Preferably, the solenoid carriage, rail and the rotational axis of said first motor, are all in line. The motor therefore adds to the inertial mass of the rail.

Preferably, a sub-frame is pivotally mounted in the frame about a sub-axis parallel said first axis, the second motor being fixed in said sub-frame, and the fixed screw of the second motor being fixed in a clevis pivoted in the housing about a clevis axis also parallel said first axis.

Said clevis may comprise pivot pins captured in a bearing bush in each clamshell in the region thereof forming said handle of the device. Again, with the motor moving with the frame, the clevis need only comprise sufficient structure to provide pivot pins and a secure mounting for the fixed screw of the second motor. On the

other hand, the sub-frame, to which the motor is fixed can serve as the heat sink for the motor which thus does not need a special element for that purpose.

5            Preferably, said first axis is between a marking point of said marking head and the point of application of said second motor to the frame. The distance between the marking point and said first axis is preferably greater than the distance between said first axis and  
10        said point of application. This has two effects, the first is to minimise the chordal travel of the marking head as it moves in the second direction. This reduces character distortion, as well as any tendency of the device to "walk" during successive impacts. On the other  
15        hand, it requires higher precision of the second motor, which commercially available stepper motors are now able to accommodate. However, the primary reason for the "scissor" action in the second direction is to facilitate the compact arrangement of the handheld device.  
20        Preferably, the solenoid, carriage, rail, rotational axis of said first motor and the pivot axis of the sub-frame in the frame, are all in line. This further increases the entire inertial mass of the device behind the solenoid piston thereby minimising recoil effects,  
25        particularly, moments. It is only with the scissor arrangement that the in line arrangement of the massive components of the marking device can all be arranged in line.

30            Preferably, said point of application comprises said sub-axis.

             Said handle may comprise a pistol grip and include a trigger to actuate the marking device.

35

Preferably, the marking device comprises a separate console controlling actuation of the motors to move the marking head in a desired pattern and to fire the marking head, a control lead from said console entering the base  
5 of said pistol-grip handle.

Preferably, said lead terminates on a distribution board disposed in said pistol grip handle, said board preferably being substantially free of electronic  
10 components.

The invention is further described hereinafter, by way of example, with reference to the accompanying drawings, in which:

15 Figure 1 is a side section through a marking device in accordance with the present invention;

Figure 2 is a section on the line II-II in Figure 1;

Figure 3 is a section on the line III-III in Figure 1; and

20 Figure 4 is a view in the direction of arrow IV in Figure 1.

Referring to the drawings, a marking device 10 comprises a plastics housing 12 comprising two clamshell  
25 halves 12a,b joined at a centre line 12c extending around the entire periphery of the device 10. The clamshell halves are connected together by screws (not shown) and define a main body 14, a pistol grip handle 16 and a top steady handle 18.

30 In the body 14 is pivotally disposed a frame 20 comprising two pivot pins 22 received in bushings 24 fitted into the housing 12. To permit variation in the dimensional precision of the clamshell housing 12 when  
35 mated together, a disc spring 26 is disposed between each

pivot pin 22 and its corresponding bearing bush 24. The disc spring 26 serves to centralise the frame 20 within the housing body 14 and take up any loose play between them.

5

The frame 20 is essentially U-shaped, along the base 21 of which is fixed a rail 28 by machine screws 30 (see Figure 4). Slideably carried in a first, x, direction on the rail 28 is a carriage 32 to which is fixed the hollow base 34 of a solenoid marking head 40. The base 34 is fixed to the carriage 32 by screws 36. A solenoid can 38 is secured to the base 34 by screws 42 and carries a solenoid 44. The solenoid is captivated by an end cap 46 screw threaded into the end of the can 38.

15

A piston 48 of ferromagnetic material is slidingly received in a bore 49 formed by the base 34, can 38 and solenoid 44. The piston at one end acts on a stylus pin 50, which is slideably received in a bore 52 of the cap 46. A spring 54 presses a head 56 of the pin 50 into engagement with the piston 48, and also presses the piston 48 towards a ready position thereof against the carriage 32, a rubber O-ring 58 serving as a cushion for the piston 28 during a rebound after firing. Likewise, the cap 46 is provided with an O-ring 60 (shown only in Figure 2) to cushion the impact of the piston 48 when the marking head is fired (at least, instead of the point of the pin 50 striking a workpiece when that is within range). A lead 62 from a distribution board 67 received in the handle 16 of the marking device 10 powers the solenoid 44 and accelerates the piston 48 rightwardly in the drawings, accelerating the pin 50 until its point impacts the surface of a workpiece (not shown).

35

To ensure that the surface to be marked by the pin



50 is located appropriately with respect to the pin, a window 64 is provided which is secured to the side of the housing body 14 by bolts 65. The window 64 comprises an essentially tubular body with an elastomeric frame 66 formed at its end. The window frame 66 has a central aperture 70 defining the limits of movement of the pin 50 within an x, y coordinate system.

In Figure 1, the window 64 has a flat front face 72, but when pipes or the like are to be marked, a V-shaped front face 72' is provided in alternative window 64', as shown in the inset to Figure 1. The bolts 65 pass through slots 74 (visible only in the inset to Figure 1) whereby the longitudinal position (in the z direction) of the window 64 with respect to the pin head 50 is adjustable. This ensures that the surface of the article to be marked is correctly distanced from the pin 50.

As mentioned above, the pin 50 is able to traverse an x,y field approximately equal to the extent of the window 70. The head 40 moves in the first, x direction by movement of the carriage 32 along the rail 28. An essentially U-shaped, sheet-metal plate 80 has its arms 80a,b bent out of the plane of its base 80c into planes orthogonal thereto. The arms 80a, b are bolted to the solenoid base 34 by screws 82 both above and below the carriage 32 and rail 28. To the base 80c is bolted a first stepper motor 84 by bolts and nuts 86.

The motor 84 rotates within its body a hollow, screw-threaded armature (not shown) which is screw-threaded on a first fixed screw 88. The fixed screw 88 is received between arms 23 of the frame 20, extending from the base 21 thereof. The screw 88 is received in bushings 90 and locked in place by a grub screw 92.

Thus, when the motor 84 is actuated, it traverses up and down the screw 98 as its armature screws on the screw 88. This moves the entire carriage 32 and connected marking head 40 backwards and forwards in the x direction.

5

A sub-frame 94 has pivot pins 96 at each end which are journaled in bearing bushes 98 formed in the ends of the arms 23 of the frame 20. A second motor 100 is bolted to the sub-frame 94 by bolts 102. A second fixed screw 104 is fixed at one end in a clevis 106 by a grub screw 107. The clevis 106 has two pivot pins 108 received in bearing bushes 110 formed in each clam shell half 12a,b in the handle region 16 of the device 10. Unlike the bearing bushes 24, no disc springs are required here, partly because the tolerances over the width of the handle 16 are less than over the width of the body 14, but primarily because lateral slackness of the fixing of the clevis 106 is not important. It is only important that there should be no slackness of the clevis in the longitudinal direction of the screw 104, that is to say, in the y direction.

Like the motor 84, the motor 104 has a rotary armature having a threaded bore which is screwed onto the fixed screw 104. Consequently, rotation of the motor 100 pivots the frame 20 with respect to the housing 14 about the pivot axis formed by the pivot pins 22 so as to move the marking pin 50 in an arc which approximates the y direction. Consequently, under appropriate control, the marking pin 50 can be positioned over the surface of a cylinder of radius equal to the distance from the pin head to the pivot axis 22. In order to make the surface of the cylinder as flat as possible so that the x,y field is as flat as possible, the axis 22 is near to the point of actuation (the intersection of the screw 104 with the

pivot axis 96 of the sub-frame 94). Indeed, it is as close as possible to the sub-frame axis 96 without compromising the resolution in the y direction achievable by the motor 100.

5

The motors 100, 84 are driven by leads 112, 114 respectively connected to distribution board 67. Distribution board 67 has sockets 116 to receive plugs on the end of a cable (not shown) extending from an aperture 10 118 formed in the base of the handle 16. Lead 120 is connected to a control console 122 (both the lead 120 and console 122 being shown schematically in Figure 1). Console 122 controls by any appropriate means the rotation of the motors 100, 84 and the timing of 15 energisation of the solenoid 44 to effect a mark on a surface in plane 62. A trigger 124 on the pistol grip handle 16 actuates the console 122 to commence a marking sequence. A series of marks so effected can define characters, machine readable or otherwise.

20

From the foregoing description, it is apparent that nearly all the components, at least the massive ones, of the marking device 10 are contained along the axis of the pin 50, being the z axis and directions of impacting of 25 the pin 50. There is therefore the maximum possible inertial mass behind the piston 48 ensuring its acceleration in the z direction is with minimum recoil experienced by the user. On the other hand, rebound of the piston 48 is received directly on the carriage 32, 30 via the cushioning O-ring 58, for maximum energy absorption in the relatively massive rail 28, and subsequently the frame 20 and ultimately the housing 12. Consequently, while firm holding of the device 10 against a surface to be marked is possible with the handles 35 16,18, the tendency for the device to "walk" during

repeated marking operations is reduced by the concentrated inertia in the line of force application which reduces vibration; the large radius of rotation of the movement in the y direction, tending to maintain the substantially orthogonal attitude of the marking head with respect to a flat surface; and the elastomeric facing of the window 64. On the other hand, by combining various components such as the housing/frame, and motor heatsink/subframe into single components, as well as by disposing the motors within the confines of the frame, a light and compact marking device is achieved which still has precise and reliable accuracy.

15

**Claims:**

1. A marking device comprising:
  - a housing of the device;
  - 5 a frame pivotally mounted in the housing about a first axis;
  - a marking head mounted on the frame for translational movement in the frame by a first motor in a first direction parallel said first axis and spaced therefrom; and
  - 10 a second motor arranged to pivot the frame with respect to the housing about said first axis in a second, substantially orthogonal direction.
- 15 2. A marking device as claimed 1, in which the housing further comprises a handle by means of which the device may be manipulated.
- 20 3. A marking device as claimed 1 or 2, in which a window is provided in the housing through which the marking head protrudes.
- 25 4. A marking device as claimed in claim 3, in which the window is detachable from the housing.
- 30 5. A marking device as claimed in claim 3 or 4, in which the window comprises a V-section across said first direction and is adjustable on the housing in a third direction substantially orthogonal to said first and second directions.
- 35 6. A marking device as claimed in claim 3, 4 or 5, in which the window has a facing of resilient material adapted to abut a surface to be marked.

7. A marking device as claimed in any preceding claim,  
in which said marking head has a pin arranged to be  
driven in a third direction substantially orthogonal  
said first and second directions against a surface to  
be marked.
9. A marking device as claimed in claim 7, in which said  
pin is driven by a solenoid coil in a head housing  
and comprises a ferromagnetic piston slideable in a  
chamber to impact a base of said pin.
9. A marking device as claimed in claim 8, in which a  
return spring returns the pin and piston to a ready  
position.
10. A marking device as claimed in any preceding claim,  
in which the frame comprises a rail and a carriage  
slideable along said rail in said first direction.
11. A marking device as claimed in claim 7 or 8 and in  
claim 10, in which said head housing is mounted  
substantially directly on said carriage and is about  
the same dimensions as said carriage so that recoil  
impacts of said piston are transmitted directly into  
said carriage and thence to the rail and frame.
12. A marking device as claimed in any preceding claim,  
in which said housing is a clamshell housing opening  
in said first direction, said frame having a pivot  
pin captured in a bearing bush in each clamshell.
13. A marking device as claimed in claim 12, in which a  
disc spring is disposed on at least one pin between  
the housing and the frame to take up any tolerance  
between the housing and frame.

## 14. A marking device comprising:

a housing of the device;

5 a frame arranged for pivotal movement with respect to the housing about a first axis;

a marking head mounted on the frame for translational movement in the frame by a first motor in a first direction parallel said first axis and spaced therefrom; and

10 a second motor arranged to pivot the frame with respect to the housing about said axis in a second, substantially orthogonal, direction; wherein

15 said marking head includes a stylus pin adapted to be driven in a third direction substantially orthogonal said first and second directions against a surface to be marked, the device having a centre of gravity substantially coincident said third direction over substantially all movements of the frame in said second direction.

20

## 15. A marking device comprising:

a housing of the device;

a frame arranged for pivotal movement with respect to the housing about a first axis;

25 a marking head mounted on the frame for translational movement in the frame by a first motor in a first direction parallel said first axis and spaced therefrom; and

30 a second motor arranged to pivot the frame with respect to the housing about said axis in a second, substantially orthogonal, direction; wherein

said motors are disposed substantially within the confines of the frame.

35 16. A marking device as claimed in 14 or 15, in which the

housing further comprises a handle by means of which the device may be manipulated.

- 5 17. A marking device as claimed in 14, 15 or 16, in which the motors each comprise a body, and a rotary armature threaded on a fixed screw.
- 10 18. A marking device as claimed in claim 17, in which the first motor is carried on the carriage, the first screw being fixed in the frame.
- 15 19. A marking device as claimed in claim 18, in which the frame comprises a U-shaped element along the base of which is fixed a rail and between the arms of which is fixed the screw.
- 20 20. A marking device as claimed in claim 19, in which the solenoid, carriage, rail and the rotational axis of said first motor, are all in line.
- 25 21. A marking device as claimed in any of claims 14 to 20, further comprising a sub-frame which is pivotally mounted in the frame about a sub-axis parallel said first axis, the second motor being fixed in said sub-frame, the fixed screw of the second motor being fixed in a clevis pivoted in the housing about a clevis axis also parallel said first axis.
- 30 22. A marking device as claimed in claims 20 and 21, in which said sub-axis is also inline with said solenoid carriage, rail and the rotational axis of said first motor.
- 35 23. A marking device as claimed in claim 21 or 22, when dependent on claim 16, in which said clevis comprises



pivot pins captured in a bearing bush in each clamshell in the region thereof forming said handle of the device.

- 5     24. A marking device as claimed in any of claims 14 to 23 and incorporating the features of any of claims 1 to 13.
- 10     25. A marking device as claimed in any preceding claim, in which said first axis is between a marking point of said marking head and the point of application of said second motor to the frame.
- 15     26. A marking device as claimed in 25, in which the distance between the marking point and said first axis is greater than the distance between said first axis and said point of application.
- 20     27. A marking device as claimed in claim 25 or 26, in which said point of application comprises said sub-axis.
- 25     28. A marking device as claimed in any preceding claim when dependent on claim 2 or 16, in which said handle comprises a pistol grip and includes a trigger to actuate the marking device.
- 30     29. A marking device as claimed in any preceding claim further comprising a separate console controlling actuation of the motors to move the marking head in a desired pattern and to fire the marking head.
- 35     30. A marking device as claimed in claims 28 and 29, in which a control lead from said console enters the base of said pistol grip handle.

31. A marking device as claimed in claim 30, in which said lead terminates on a distribution board disposed in said pistol grip handle.

5

32. A marking device substantially as hereinbefore described with reference to the accompanying drawings.

**Abstract:**  
**MARKING DEVICE**

A marking device (10) comprises a housing (12) having a handle (16). A frame (20) is pivotally mounted in the housing about a first axis (22). A marking head (40) mounted on the frame for translational movement in the frame by a first motor (84) in a first direction (x) parallel said first axis and spaced therefrom. A second motor (100) is arranged to pivot the frame with respect to the housing about said first axis in a second, substantially orthogonal direction (y). The pin moves in a third orthogonal direction (z). The motors (84,100) are disposed within the confines of the frame (20) and move on fixed screws (84,104).



2/4

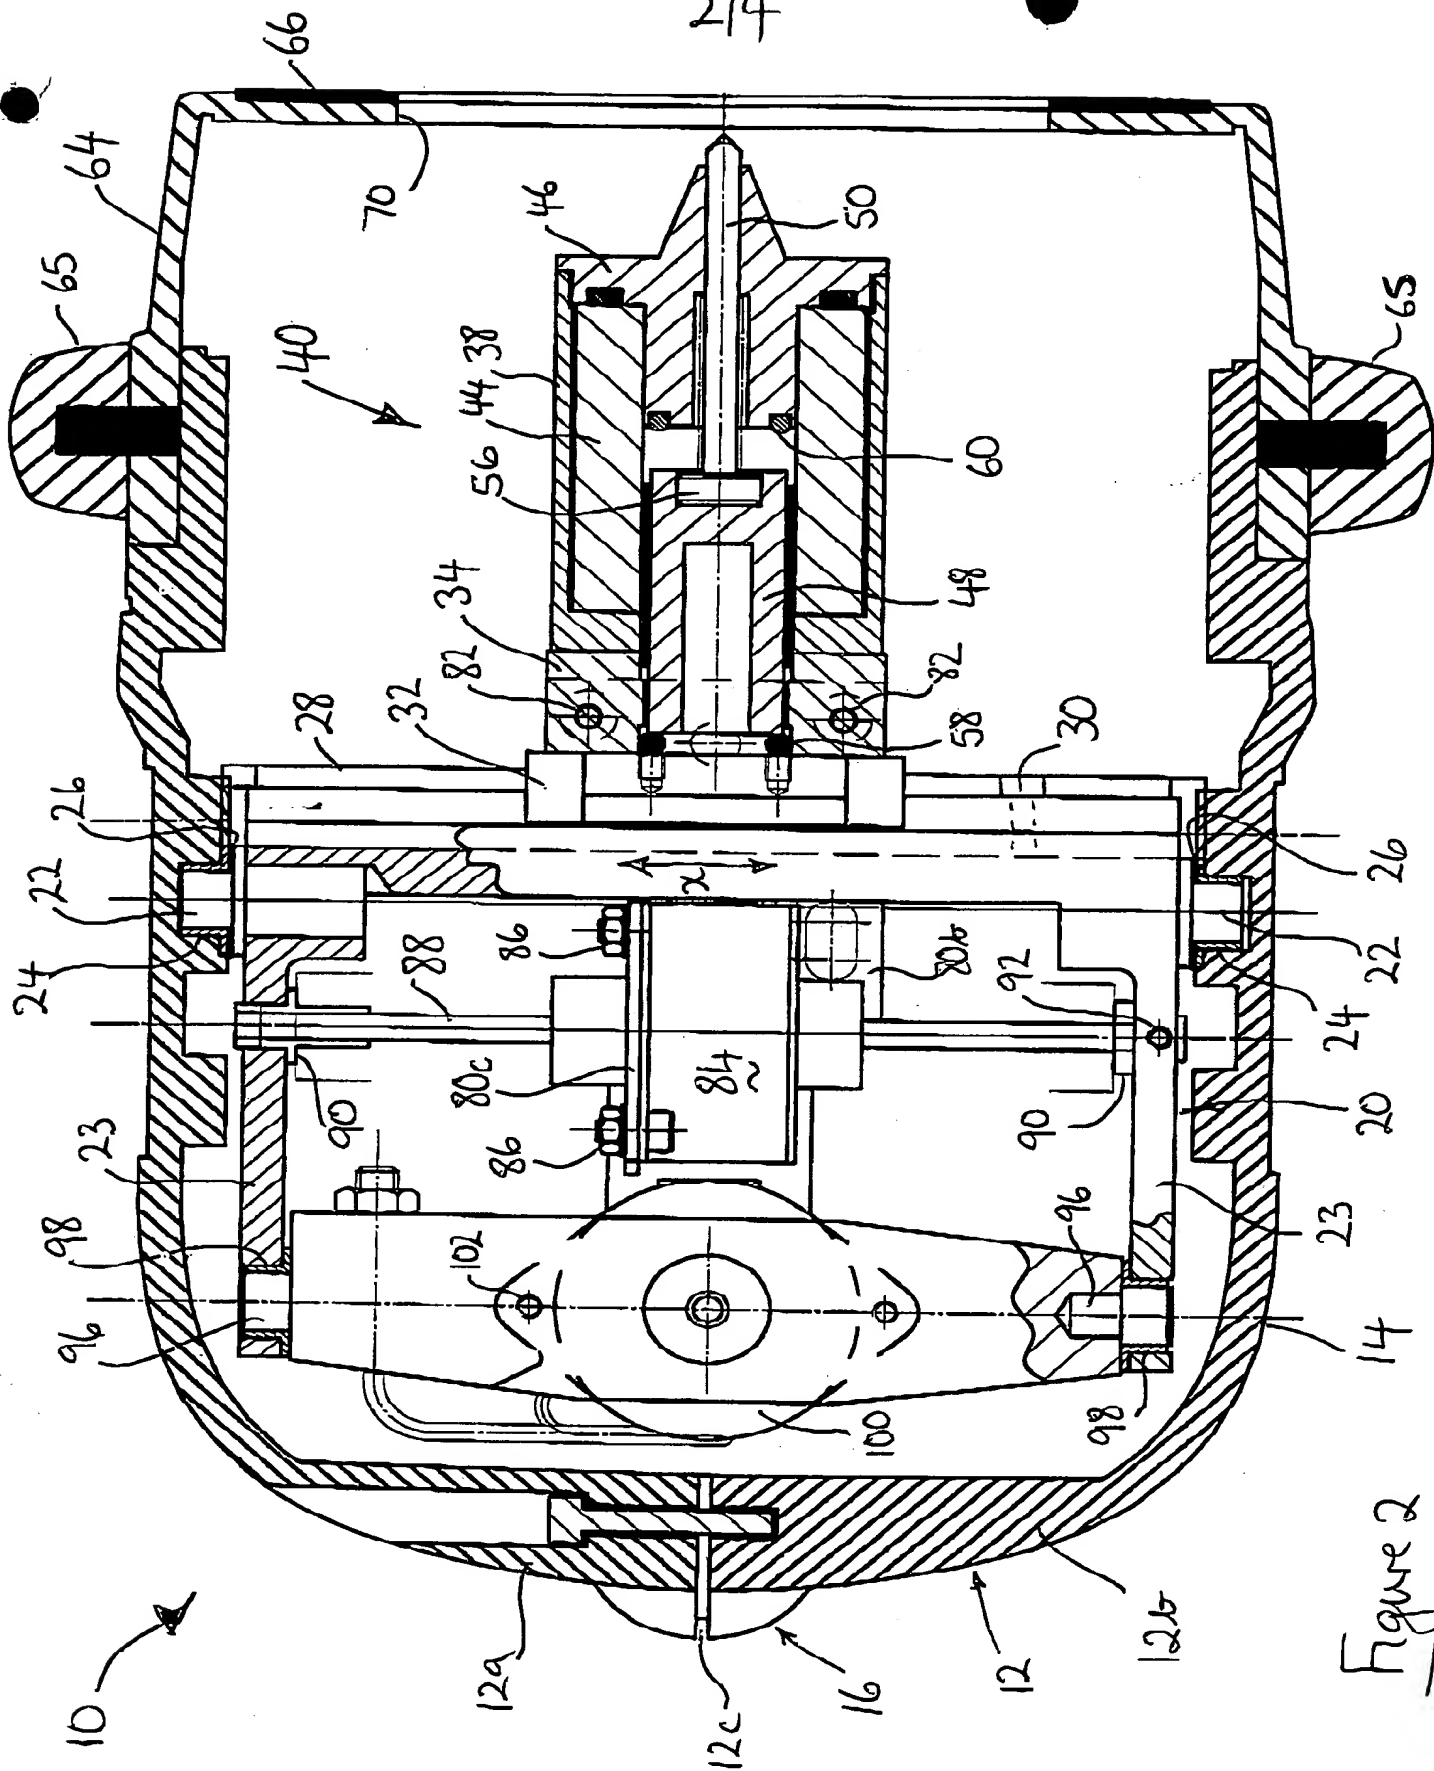


Figure 2

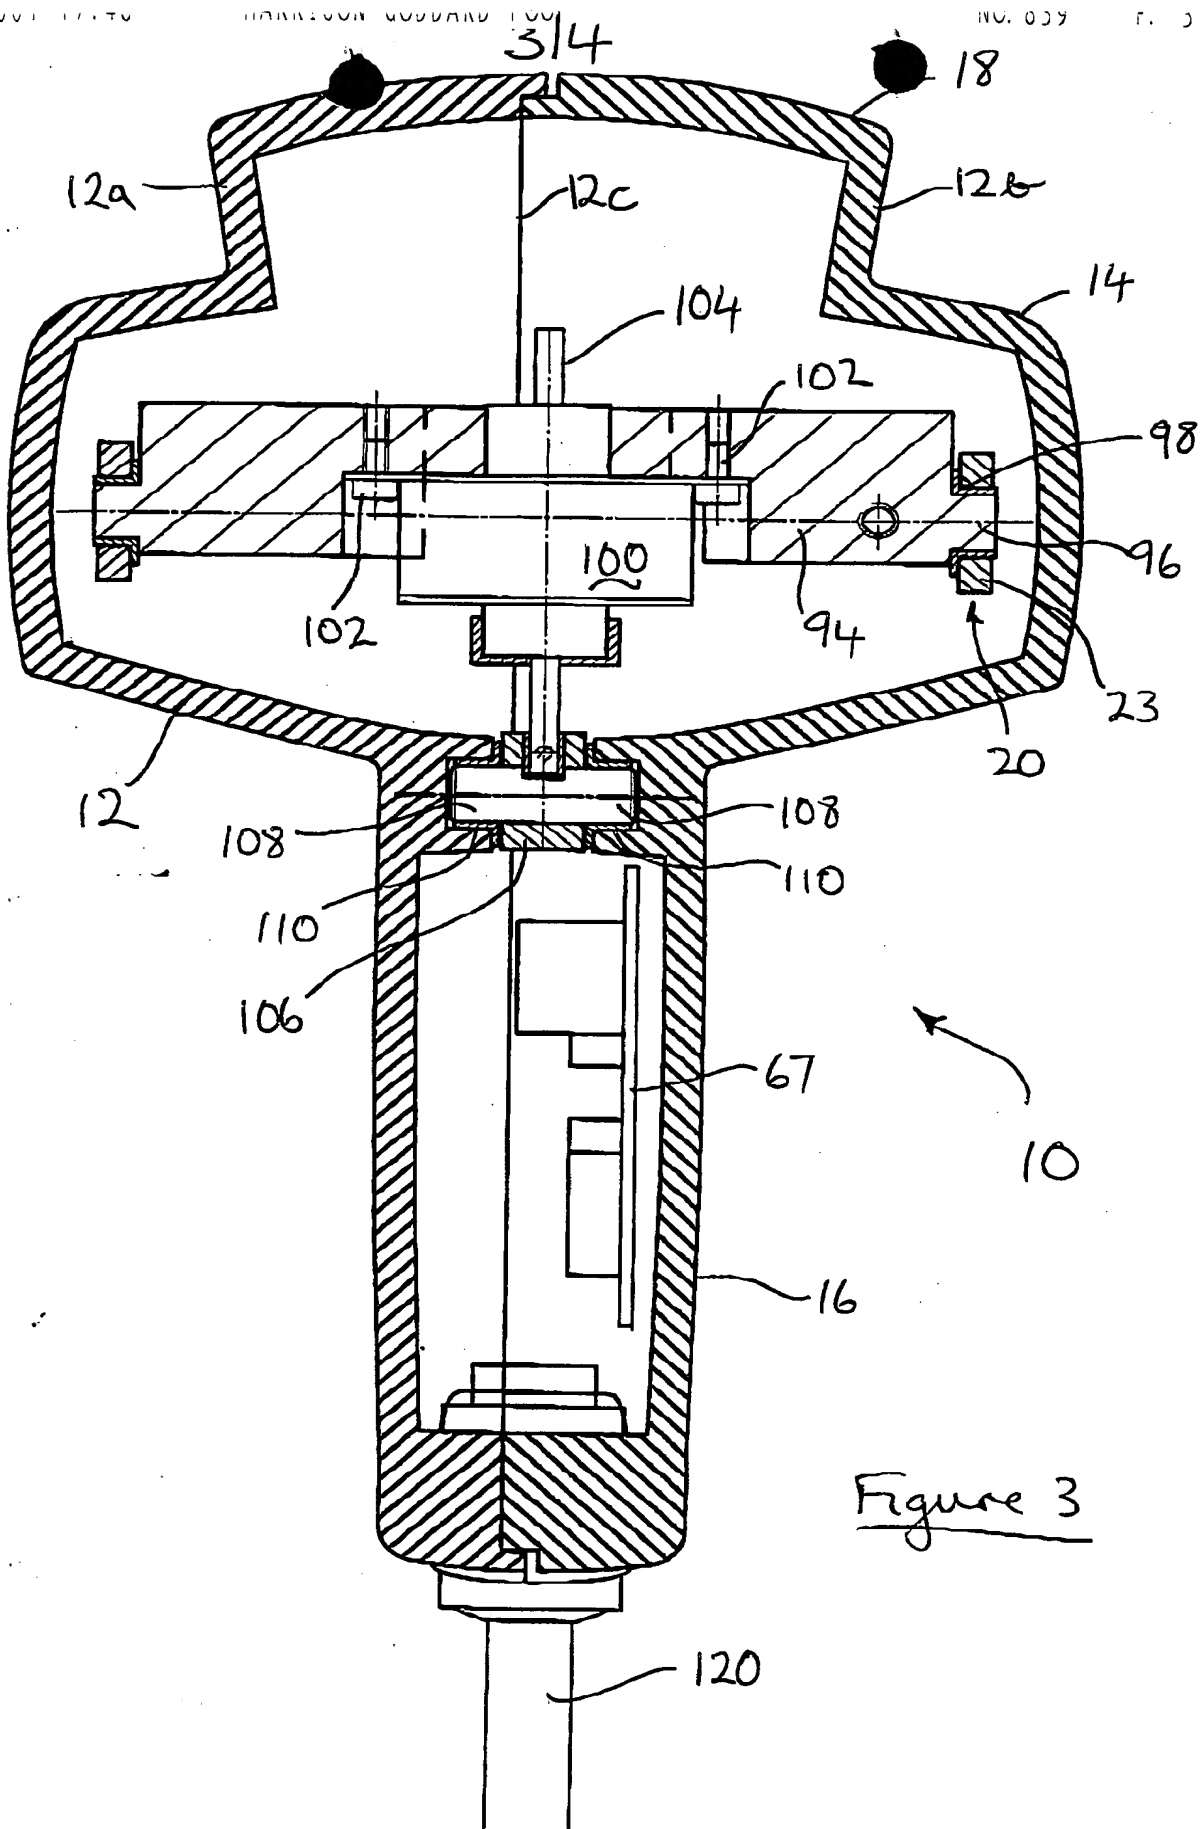
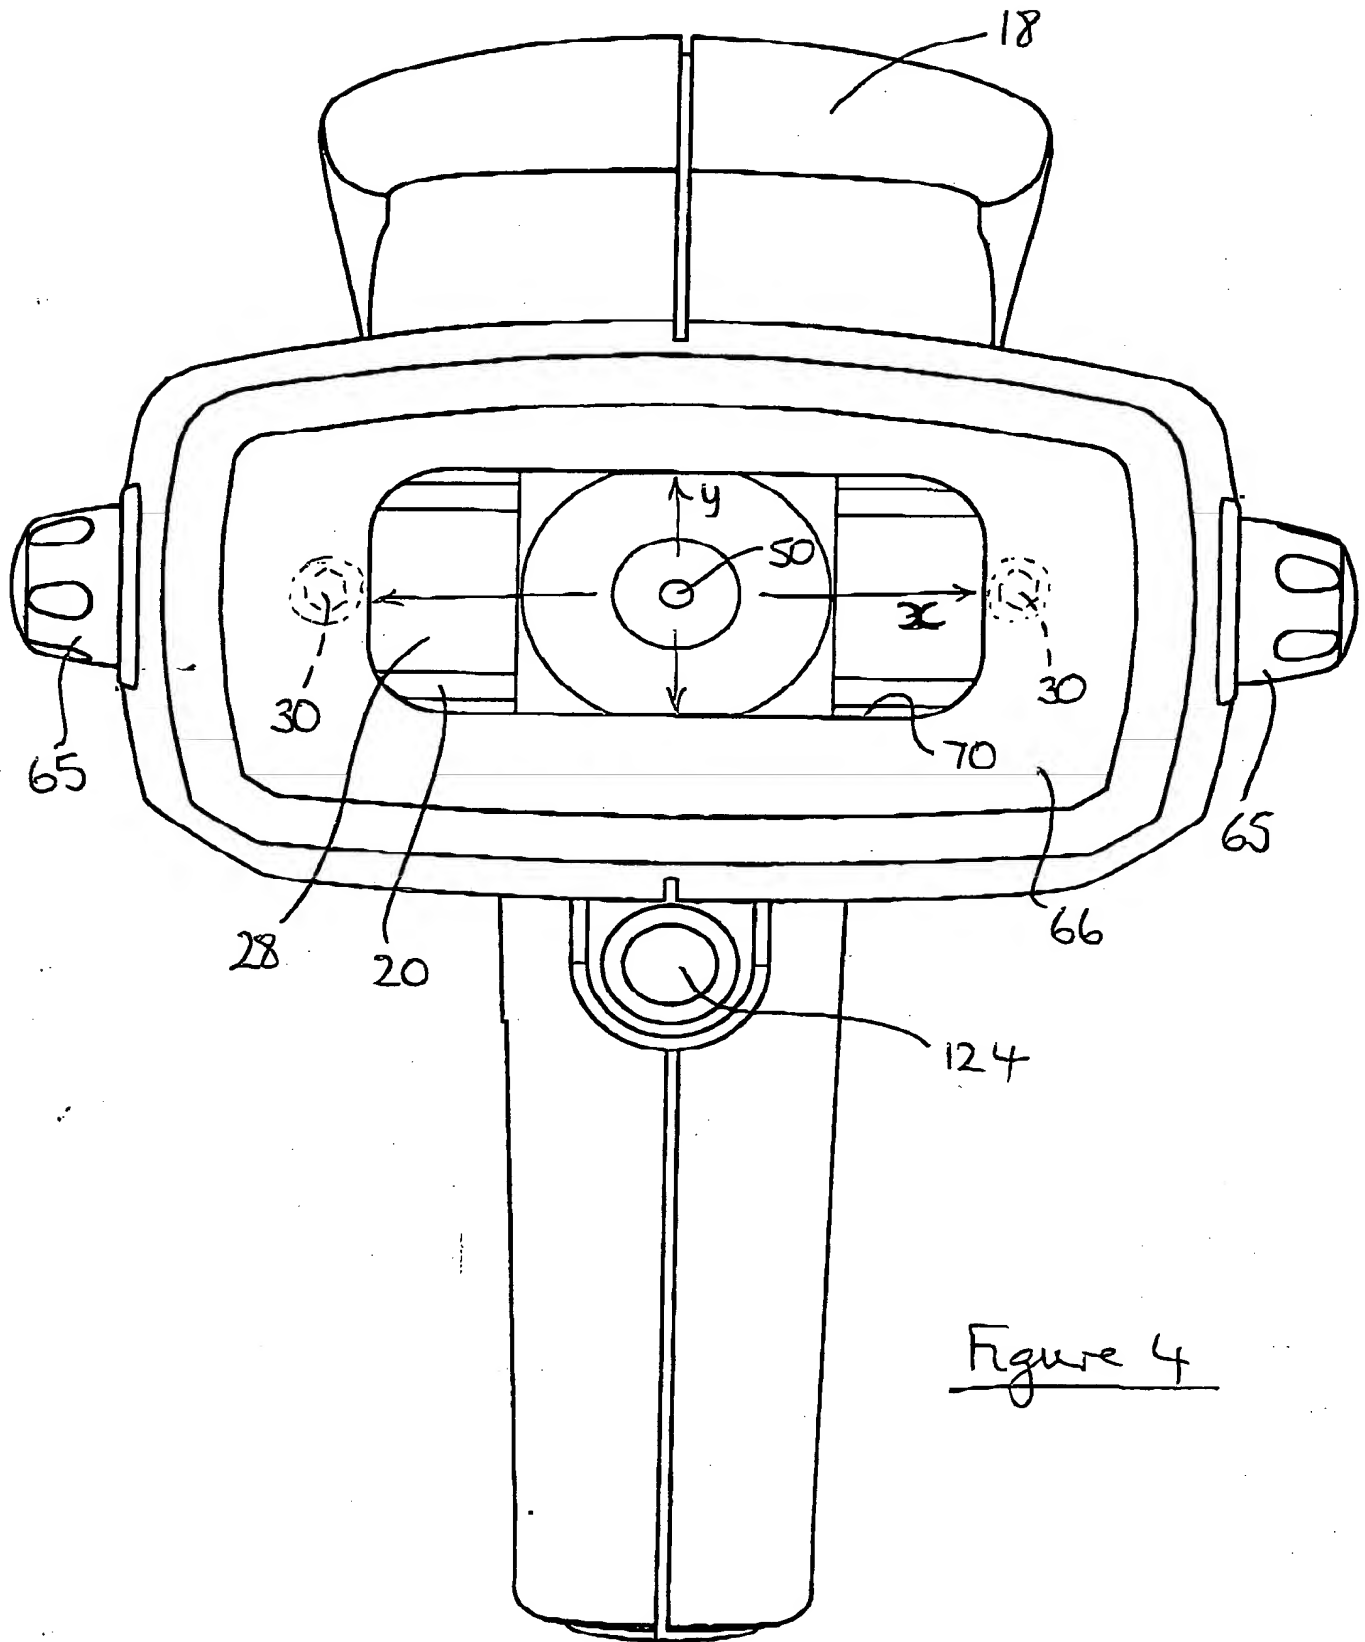


Figure 3

4/4

Figure 4